


NOTES:


1. ALL CONCRETE TO BE CLASS "B", MAG SECTION 725.
2. ALL RAMP AND DETECTABLE WARNING SHALL BE ALIGNED PERPENDICULAR TO THE CURB. CROSSWALKS SHALL BE ALIGNED PERPENDICULAR TO THE STREET CENTERLINE AS MUCH AS POSSIBLE.
3. SEE PLANS FOR LOCATION OF SIDEWALK RAMP CENTERLINE.

LEGEND

- 12:1 MAXIMUM SLOPE,
15:1 DESIRED SLOPE
- 2% MAXIMUM SLOPE,
1.5% MINIMUM SLOPE
- 8" SIDEWALK RAMP PAYMENT
LIMITS AND HEAVY ROUGH
BROOM FINISH LIMITS

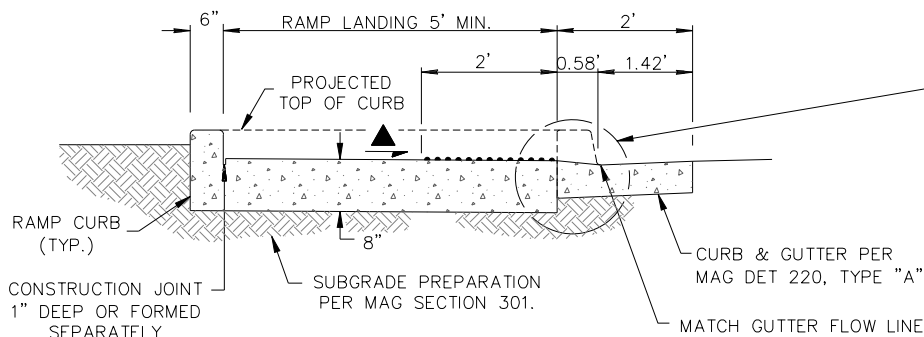

SECTION A-A

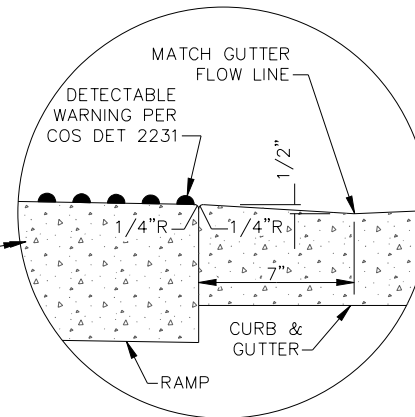

DETAIL 1

DETAIL NO.
2235-2

**City of Scottsdale
Standard Details**

APPROVED BY:
**Scottsdale Standards &
Specifications Committee**

MID-BLOCK SIDEWALK RAMP - TYPE B

DETAIL NO.
2235-2