

REVISED 5/9/02


NOTE:

- 1. 1/2" Expansion Joint, ASTM D-1751 Per MAG Section 729.


30' x 14' x 6" Thick Concrete Approach Slab With Thickened Edges, Class "B" Concrete w/ 6"x 6", 1.4 x 1.4 WWF, On Compacted Subgrade. Approach Slab Shall Have A Constant Slope Which Matches The Enclosure Slab.

30' x 14' x 6" Thick Concrete Approach Slab With Thickened Edges, Class "B" Concrete w/ 6"x 6", 1.4 x 1.4 WWF, On Compacted Subgrade. Approach Slab Shall Have A Constant Slope Which Matches The Enclosure Slab.


* In locations where a 30' approach slab is not possible, approval from the City of Scottsdale Quality Compliance Division is required.

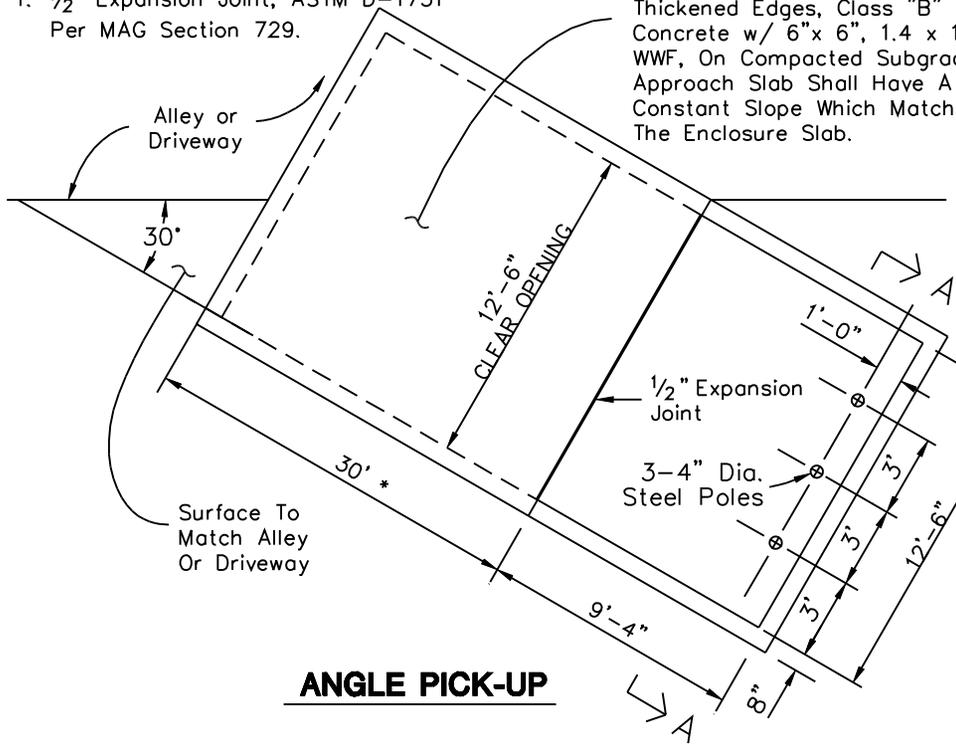


ANGLE PICK-UP

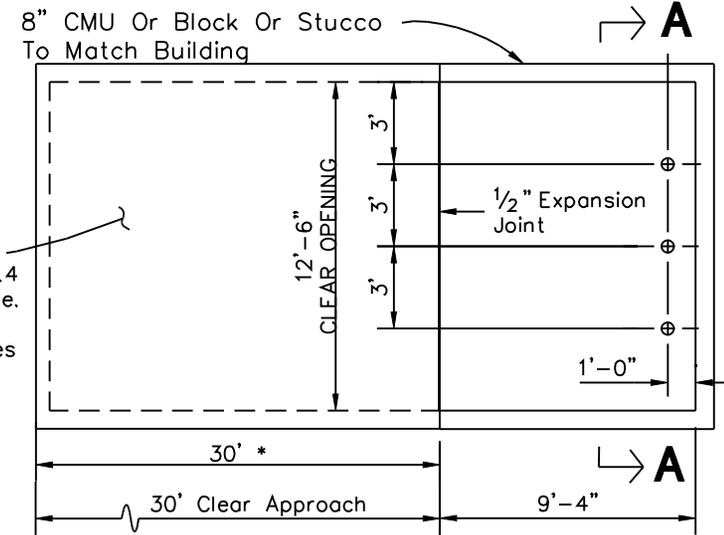


HEAD ON PICK-UP

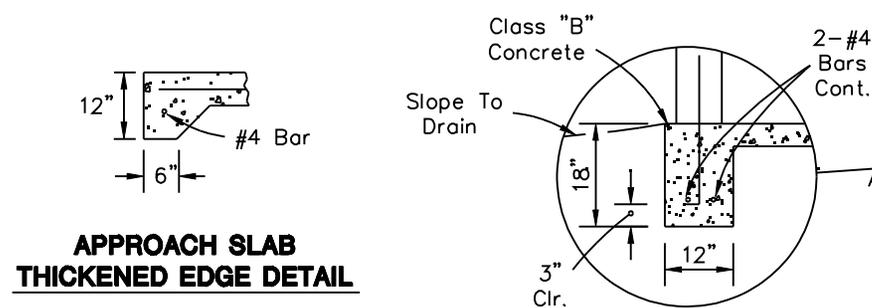

APPROACH SLAB THICKENED EDGE DETAIL

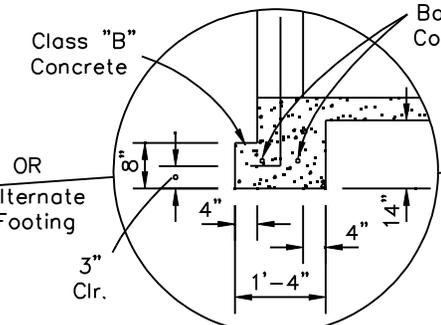

Alternate Footing

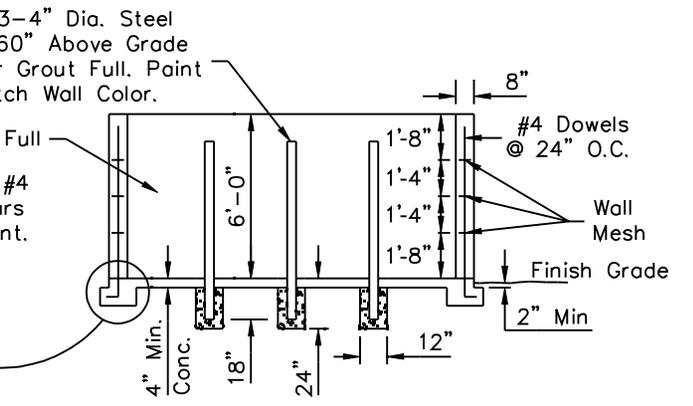

SECTION A-A

DETAIL NO. 2146-1

City of Scottsdale Standard Details

APPROVED BY: Scottsdale Standards & Specifications Committee

REFUSE ENCLOSURE

DETAIL NO. 2146-1