


VERTICAL CURB & GUTTER WITH DEPRESSED LIP

TYPE 'A'

NOTES

1. All exposed surfaces to be trowel finished except as shown. See M.A.G. Section 340.
2. Contraction joint spacing shall be 10' maximum or as directed by the Inspector.
3. Construct curb and install 1/2" mastic expansion joints, A.S.T.M. D-1751, per M.A.G. Sec. 340 & 729 and COS Sec. 340.
4. Colored concrete shall be colored integrally.

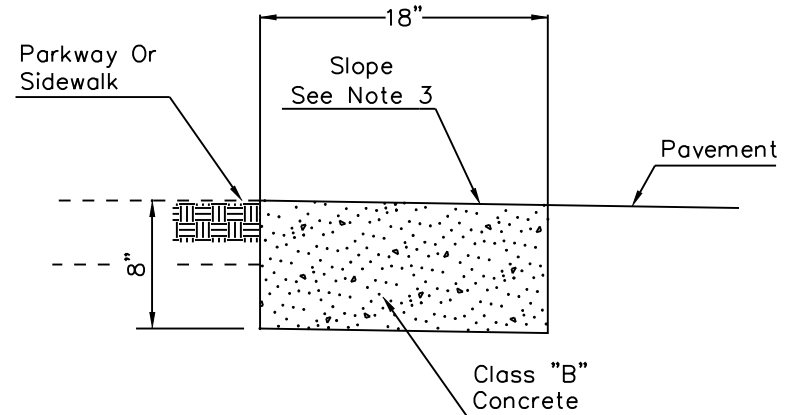

RIBBON CURB TYPE 'B'

NOTES

1. Construct curb and install 1/2" mastic expansion joints, A.S.T.M. D-1751, per M.A.G. Sec. 340 & 729 and COS Sec. 340.
2. Broom finish all surfaces.
3. Ribbon curb may slope towards pavement or parkway. Match cross slope of road unless indicated otherwise on plans.
4. Contraction joint spacing shall be 10' maximum or as directed by the Inspector.
5. Colored concrete shall be colored integrally.

DETAIL NO.
2220

**City of Scottsdale
Standard Details**

APPROVED BY:
**Scottsdale Standards &
Specifications Committee**

CURB AND GUTTER - TYPES A & B

DETAIL NO.
2220