


REVISED 3/31/10

CURVE DATA - TO BACK OF CURB			
CURVE	RADIUS	LENGTH	DELTA
C1	0.50'	1.43'	164°12'35"
C2	80.00'	22.05'	15°47'25"
C3	3.00'	9.42'	180°00'00"

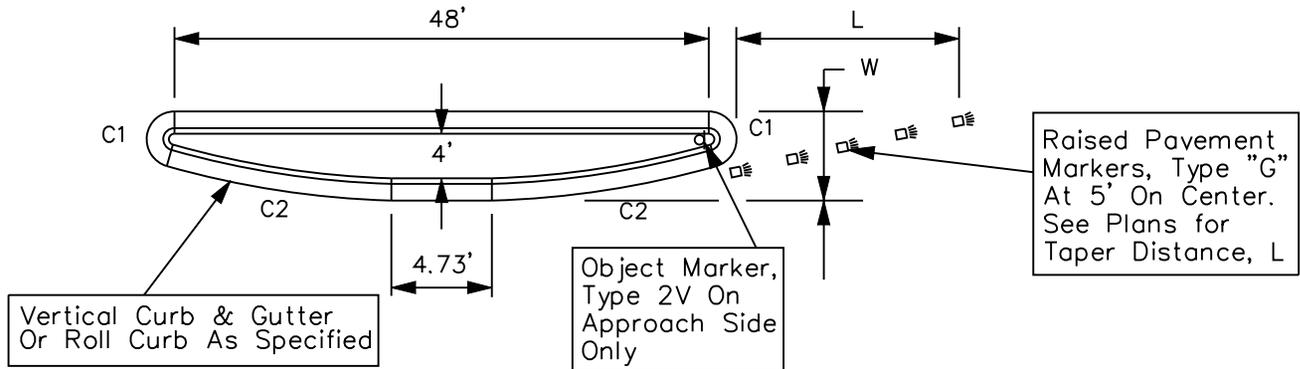

### SIDE ISLAND DETAIL

If Roadway Striping Consists Of:  
 -Double Yellow (DY) Line, Then  
 Install DY Taper And RPMs  
 -Yellow Skips, Then  
 Install DY Taper And RPMs  
 -No Striping, Then  
 Install RPMs Only


Taper Distance, L  
 (Typ) See Plans

Offset Width, W (Typ)


Install Median Nose Signing per  
 COS Std. Detail 2133:  
 For  $\leq 30$  MPH Use "Type B"  
 For  $> 35$  MPH Use "Type A"

Vertical Curb & Gutter  
 Or Roll Curb As Specified

If Roadway Striping Consists Of  
 Two-Way Left Turn Markings,  
 Paint Top And Front Of Curb With  
 ReflectORIZED Yellow Traffic Paint

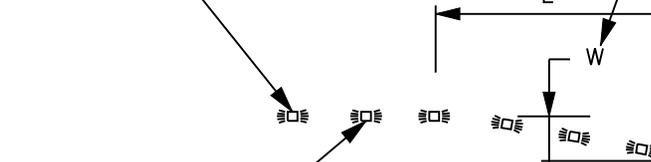

Raised Pavement Markers (RPMs),  
 Type "D" At 5' On Center  
 If Also Installing DY Taper, Place  
 RPMs In Middle Of Yellow Stripes

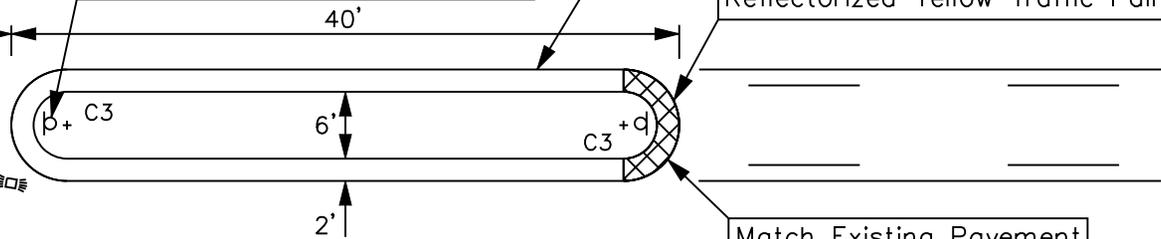

### MEDIAN ISLAND DETAIL

Match Existing Pavement  
 Elevation And Slope  
 (Typ. Each End)

DETAIL NO.  
**2290-1**

**City of Scottsdale**  
 Standard Details

APPROVED BY:  
**Scottsdale Standards &  
 Specifications Committee**

## MEDIAN ISLAND DETAILS

DETAIL NO.  
**2290-1**