


Staking Required For Trees In 36" Box Or Less Or With A Caliper Of Less Than 2". (2) 2" Diameter x 10' Long Lodgepole Pine Tree Stakes. Bury 3' In Ground And Cut Off Stake 12" Above Tie Wire. Stakes Shall Remain In Place For 2 Years Unless Removal Is Approved By Maintenance Director Or Designee.

Do Not Place Decomposed Granite Within 2" Of Trunk.

Backfill With Native Soil. (No Rocks Greater Than 3") Backfill 3/4 The depth Of Rootball Before Removing Box Side Panels. Compact Backfill As Needed To Prevent Breaking Rootball.

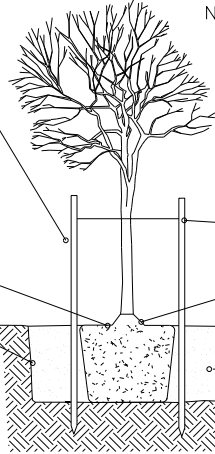

- Notes: 1. Sufficient clearance shall be maintained between trees and utility facilities so as to not hinder use of these facilities.
2. Plant pit basins within sloped planting areas shall be constructed with a max. 2:1 slope. Provide smooth transition to surrounding finish grade.

Tie Wire With Hose Chafing Guard Per Specs. As Required.

Set Top Of Root Ball 1" to 2" Above Finished Grade

Planting Hole Shall Be 3 Times Diameter Of Root Ball And No Deeper Than Height Of Rootball. Scarify Sides And Bottom Of Planting Hole

## Salvaged Tree Planting


Thin Top 6-8 Fronds, Tie With Natural Fiber Twine. (Remove Ties Prior To Buckling 60-90 Days).

Plant At Depth Which Plant Was Grown. Adjusting Root Ball Depth To Align Finished Height Will Not Be Allowed.

Do Not Place Decomposed Granite Within 2" Of Trunk.

100% Golf Sand Backfill. Settle Backfill With Water, Do Not Pack Backfill.

Planting Hole Width Shall Be 3 Times Diameter Of Roots And No Deeper Than The Extension Of The Roots.

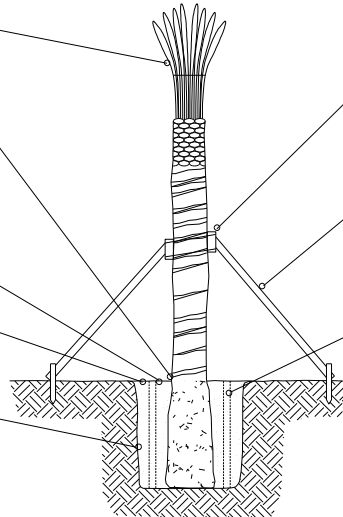


2"x 4" Blocking Nailed To Brace. Tie To Trunk With 1" (Min.) Vinyl Tie.

(3) 2"x 6" Braces, Spaced Equally And Nailed To Wooden Stakes In The Ground.


4" Perforated PVC, 2 Per Tree. Wrap PVC With Soil Screen Fabric.

## Palm Planting and Bracing Detail

12 Gauge Double Strand Galvanized And Annealed Wire. Tie Wire To The Inside Of Stakes. Turn In Or Crimp Ends To Prevent Injury.

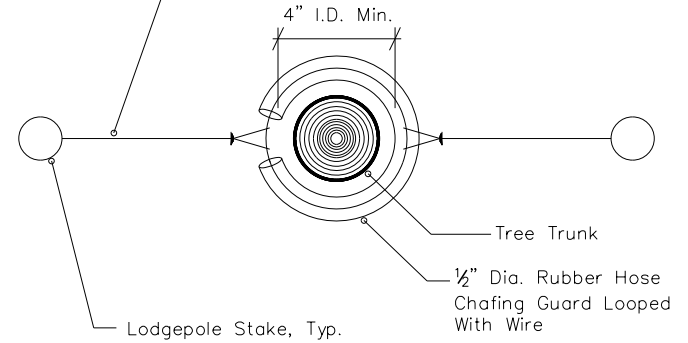

## Tree Staking - Plan View

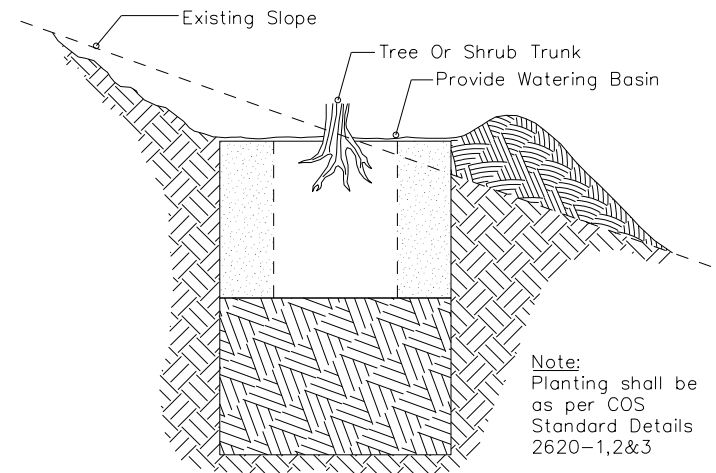

Note: Planting shall be as per COS Standard Details 2620-1,2&3

## Tree & Shrub On Slope Planting

DETAIL NO.

**2620-3**

**City of Scottsdale  
Standard Details**

APPROVED BY:

**Scottsdale Standards &  
Specifications Committee**

**LANDSCAPE DETAILS**

DETAIL NO.

**2620-3**