REVISED: 05/02/08

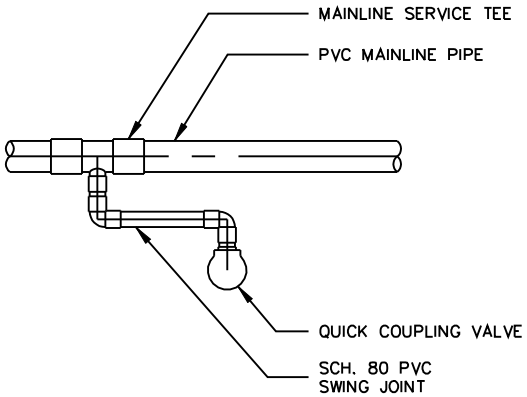

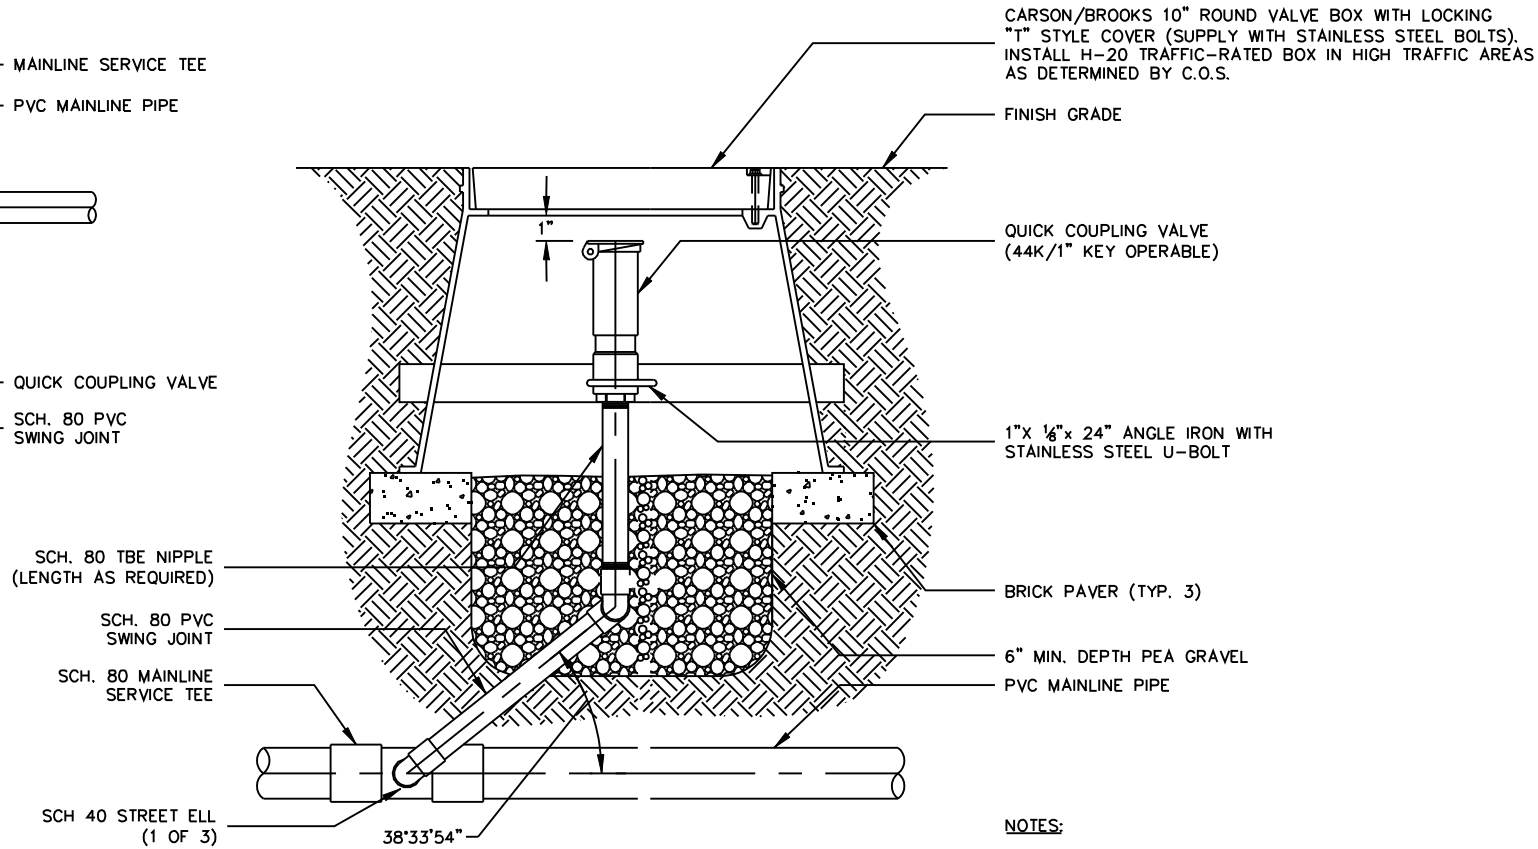

NOTES:

1. EACH QUICK COUPLER SHALL BE IN A SEPARATE VALVE BOX.
2. SWING JOINT SHALL BE THE SAME SIZE AS QUICK COUPLER VALVE.
3. NO PRE-FAB SWING JOINTS.
4. U-BOLT TO BE SECURED WITH LOCK WASHERS AND BACK-UP LOCKING NUT.

QUICK COUPLER ASSEMBLY

SCALE: NTS

DETAIL NO. 2649	City of Scottsdale Standard Details	APPROVED BY: Scottsdale Standards & Specifications Committee	QUICK COUPLER ASSEMBLY	DETAIL NO. 2649