

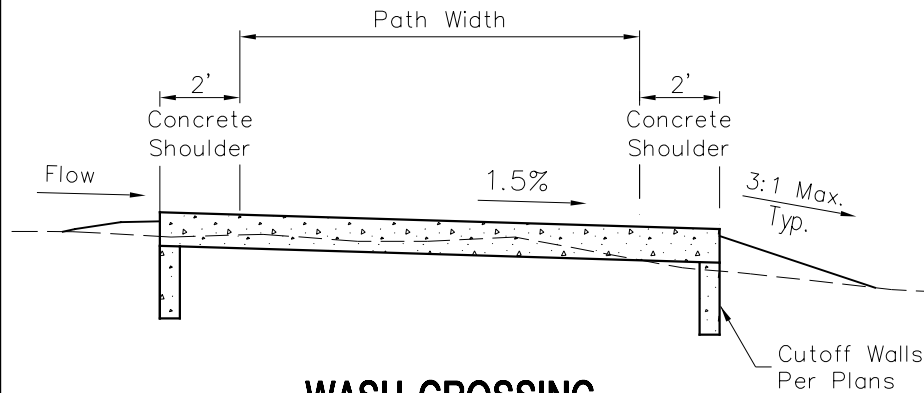
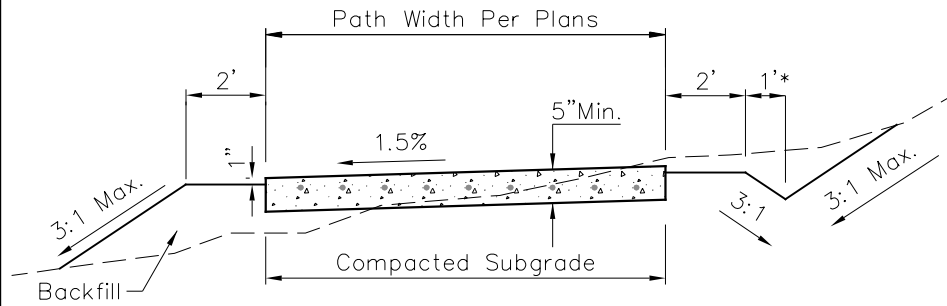


NOTES

1. Path construction per MAG Sect. 340 and COS Supplemental Specs. to MAG.
2. Expansion Joint per MAG Dtl. 230 with a maximum spacing of 50'.
3. Contraction joint shall be saw cut to 1/3 of the slab depth and conform to MAG Sect. 324.
4. Path shall be a minimum 10-foot width unless otherwise approved by the City.
- * Each project shall evaluate the need for drainage swale.

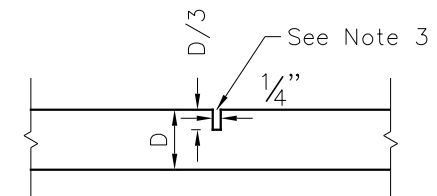

WASH CROSSING

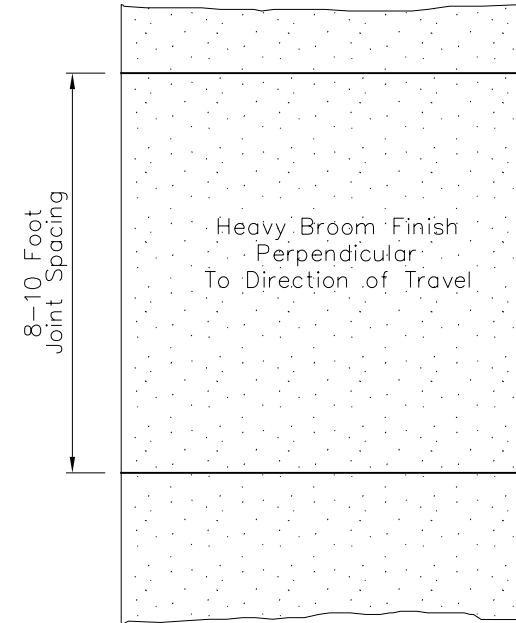

CONTRACTION JOINT

DETAIL NO.
2283

**City of Scottsdale
Standard Details**

APPROVED BY:
**Scottsdale Standards &
Specifications Committee**

MULTI USE CONCRETE PATH

DETAIL NO.
2283